


## INA SX011818 complex bearings

Bearing No. SX011818

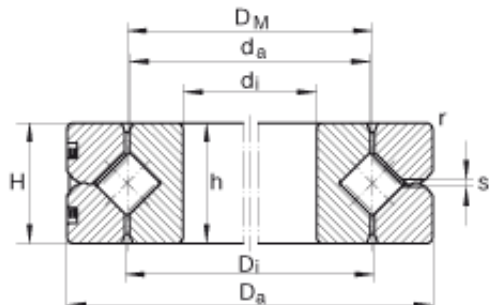

SX011818 Bearing 2D drawings and 3D CAD models

Size	90x115x13 mm
Bore Diameter	90 mm
Outer Diameter	115 mm
Width	13 mm
$d_i$ - 90 mm / Tolerance: K6+0,004 / -0,018	90 mm / Tolerance: K6+0,004 / 0,018
$D_a$ - 115 mm / Tolerance: h6 -0,022	115 mm / Tolerance: h6 0,022
H - 13 mm / Tolerance: +/-0,12	13 mm / Tolerance: +/-0,12
$D_i$	102,5 mm
$D_M$	102 mm
$d_a$	101,5 mm
h - 13 mm / Tolerance: E8 -0,01	13 mm / Tolerance: E8 0,01
$r_{min}$	1 mm
S	1,2 mm
m	0,4 kg / Weight
	0,010 mm / Running accuracy, radial
	0,010 mm / Running accuracy, axial
$S_{r min}$	0,003 mm / Min. radial bearing clearance
$S_{r max}$	0,015 mm / Max. radial bearing clearance
$S_{k min}$	0,006 mm / Min. axial tilting clearance



## NTN BEARING USA CORP.

$S_{k\max}$	0,03 mm / Max. axial tilting clearance
$RLO_{\max}$	0,003 mm / Low clearance: Radial clearance
$RLO_{\max}$	0,006 mm / Low clearance: Preload
$VSP_{\min}$	0,003 mm / Min. bearing preload
$VSP_{\max}$	0,015 mm / Max. bearing preload
$C_a$	25500 N / Dynamic load rating (axial)
$C_{0a}$	91000 N / Static load rating (axial)
$C_r$	18300 N / Dynamic load rating (radial)(for radial load only)
$C_{0r}$	36500 N / Static load rating (radial)(for radial load only)
$n_{G\ OI}$	1500 1/min / Limiting speed for oil lubrication with normal clearance
$n_{G\ Fett}$	750 1/min / Limiting speed for grease lubrication with normal clearance
$n_{G\ OI}$	750 1/min / Limiting speed for oil lubrication with preload
Category	Ball Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	0.479
Product Group	B00234