


INA FLCTE40 bearing units

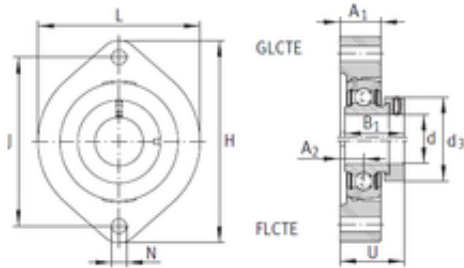

FLCTE40 Bearing 2D drawings and 3D CAD models

Bearing No. FLCTE40

| | |
|-------------------------------|-----------------------|
| Bore Diameter | 40 mm |
| d | 40 mm |
| U | 46,3 mm |
| d3 | 58 mm |
| A1 | 24 mm |
| B1 | 43,8 mm |
| H | 150 mm |
| J | 119 mm |
| L | 100 mm |
| N | 14 mm |
| A2 | 13,5 mm |
| Weight | 1,27 Kg |
| Basic dynamic load rating (C) | 32,5 kN |
| Category | Flange Block Bearings |
| Inventory | 0.0 |
| Manufacturer Name | SCHAEFFLER GROUP |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 1.521 |
| Product Group | M06110 |
| Number of Mounting Holes | 2 |
| Mounting Method | Eccentric Collar |
| Housing Style | 2 Bolt Flange Block |
| Rolling Element | Ball Bearing |
| Housing Material | Cast Iron |
| Expansion / Non-expansion | Non-expansion |
| Mounting Bolts | 14 Millimeter |



NTN BEARING USA CORP.

| | |
|------------------------------------|--|
| Relubricatable | No |
| Insert Part Number | RAE40NPPB |
| Seals | Double Lip Contact |
| Housing Configuration | 1 Piece Solid |
| Pilot Configuration | No Pilot |
| Inch - Metric | Metric |
| Long Description | 2 Bolt Flange Block; 40MM Bore; 120MM Bolt Circle; 119MM Bolt Spacing; 1 Piece Solid; Eccentric Collar Mount; Cast Iron; Ball Bearing; 43.7MM Length Thru Bore; No Relubricatable; Double Lip Contact Se |
| Other Features | Single Row Small Center Bolt With Set Screw |
| Category | Flange Block |
| UNSPSC | 31171501 |
| Harmonized Tariff Code | 8483.20.40.40 |
| Noun | Bearing |
| Keyword String | Flanged |
| Manufacturer URL | http://www.ina.com |
| Manufacturer Item Number | FLCTE40 |
| Weight / LBS | 2.8 |
| Bore | 1.575 Inch 40 Millimeter |
| Nominal Bolt Circle Diameter Round | 4.7 Inch 120 Millimeter |
| Bolt Spacing | 4.685 Inch 119 Millimeter |
| Cartridge Pilot Diameter | 0 Inch 0 Millimeter |
| Length Thru Bore | 1.72 Inch 43.7 Millimeter |
| Cartridge Pilot Depth | 0 Inch 0 Millimeter |